




Product Datasheet

SunSpot 46 Landing/Recognition Light 01-2130-HX

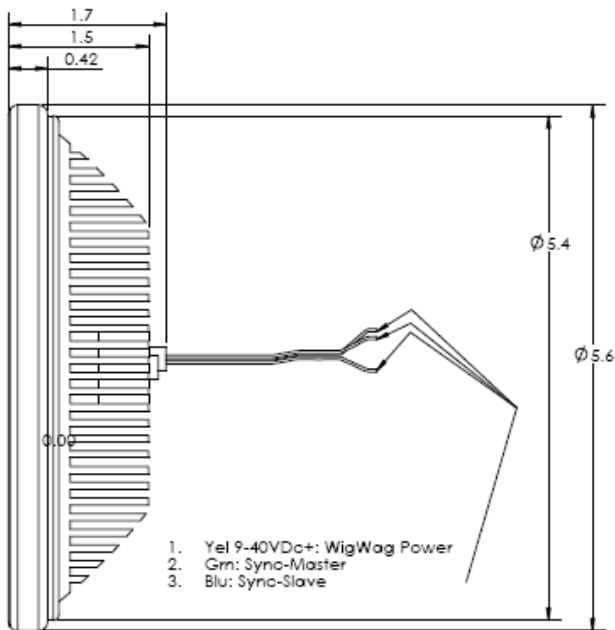


#6 Screw Terminals

1) Vis +: 9-40VDC+ (typ)

2) Grnd (typ)

Note: (no polarity, Ref. Doc. 0010-004)

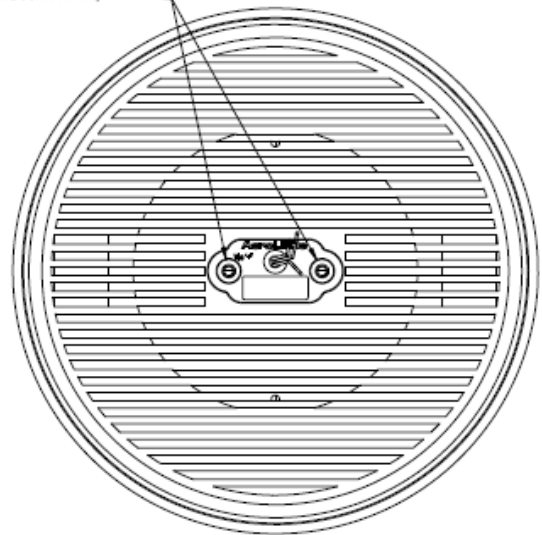

Voltage Range: 9-40VDC
 Current Draw at 28VDC: 3.2 Amps Max
 Power Consumption: 90 Watts Max
 Pulse Light Feature: Built In
 Wig Wag Sync: Built In
 Thermal Protection: Built In
 Landing Lens Candela: 120,000+
 Landing Beam Angle: 10 Degrees
 Total LED Lumens: 5000+
 LED Count: 9

Height: 5.6" Diameter (round)
 Width: 5.6" Diameter (round)
 Depth: 1.7"
 Weight: 11 Oz
 Heat Sink Material: Black Anodized Aluminum
 Lens Material: Polycarbonate
 Lens Protection: UV Resistant Hard Coat
 Clamp Mount Option: PAR 46 Ring Clamp
 Rated Life: 50,000 Hours
 Temperature Range: -55C to +70C