

NOTES: UNLESS OTHERWISE SPECIFIED

1. INSPECT PER FAR 21.303(h) QUALITY SYSTEM.


2. BATTERY CONFORMS TO THE DESIGN REQUIREMENTS OF 14 CFR PART 25.1353(c).

3. SEE DRAWING NUMBER CB-00118 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.



4. TERMINAL HARDWARE KIT (CBC PN 9586) CONTAINS M8 HEX HEAD SCREWS AND CONICAL WASHERS.
5. ALL DIMENSIONS ARE IN INCH [MM].

6. BATTERIES ARE RATED IAW INTERNATIONAL ELECTROTECHNICAL COMMISSION STANDARD 952-1. UNLESS OTHERWISE SPECIFIED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	ADDED BATT WEIGHT TO TABLE	6/5/00	JBT
B	REVISED RATING CHART; NOTE 3, ADDED NOTE 5 & 6	2/5/02	JBT

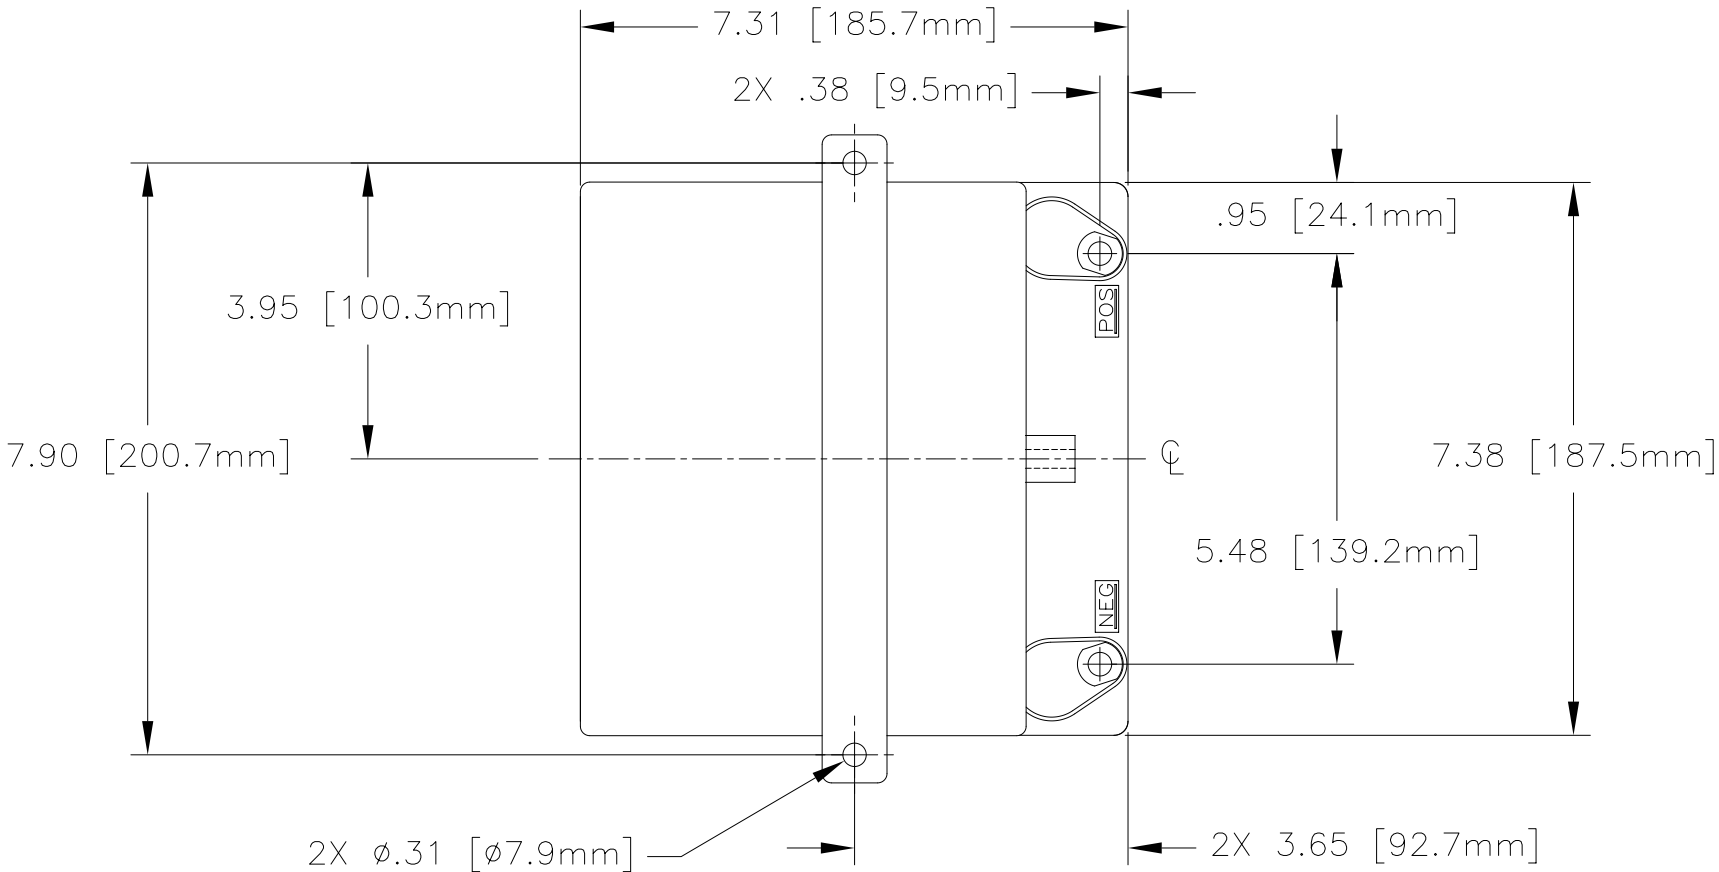

CAPACITY RATINGS	
PART NUMBER	CB24-11M
MAXIMUM WEIGHT	28 LBS [12.7 kg]
RATED CAPACITY, C ₁	10 AH
POWER RATING AT 23°C (74°F)	lpr 353 A, lpp 554 A
POWER RATING AT -18°C (0°F)	lpr 281 A, lpp 437 A
POWER RATING AT -30°C (-22°F)	lpr 166 A, lpp 317 A

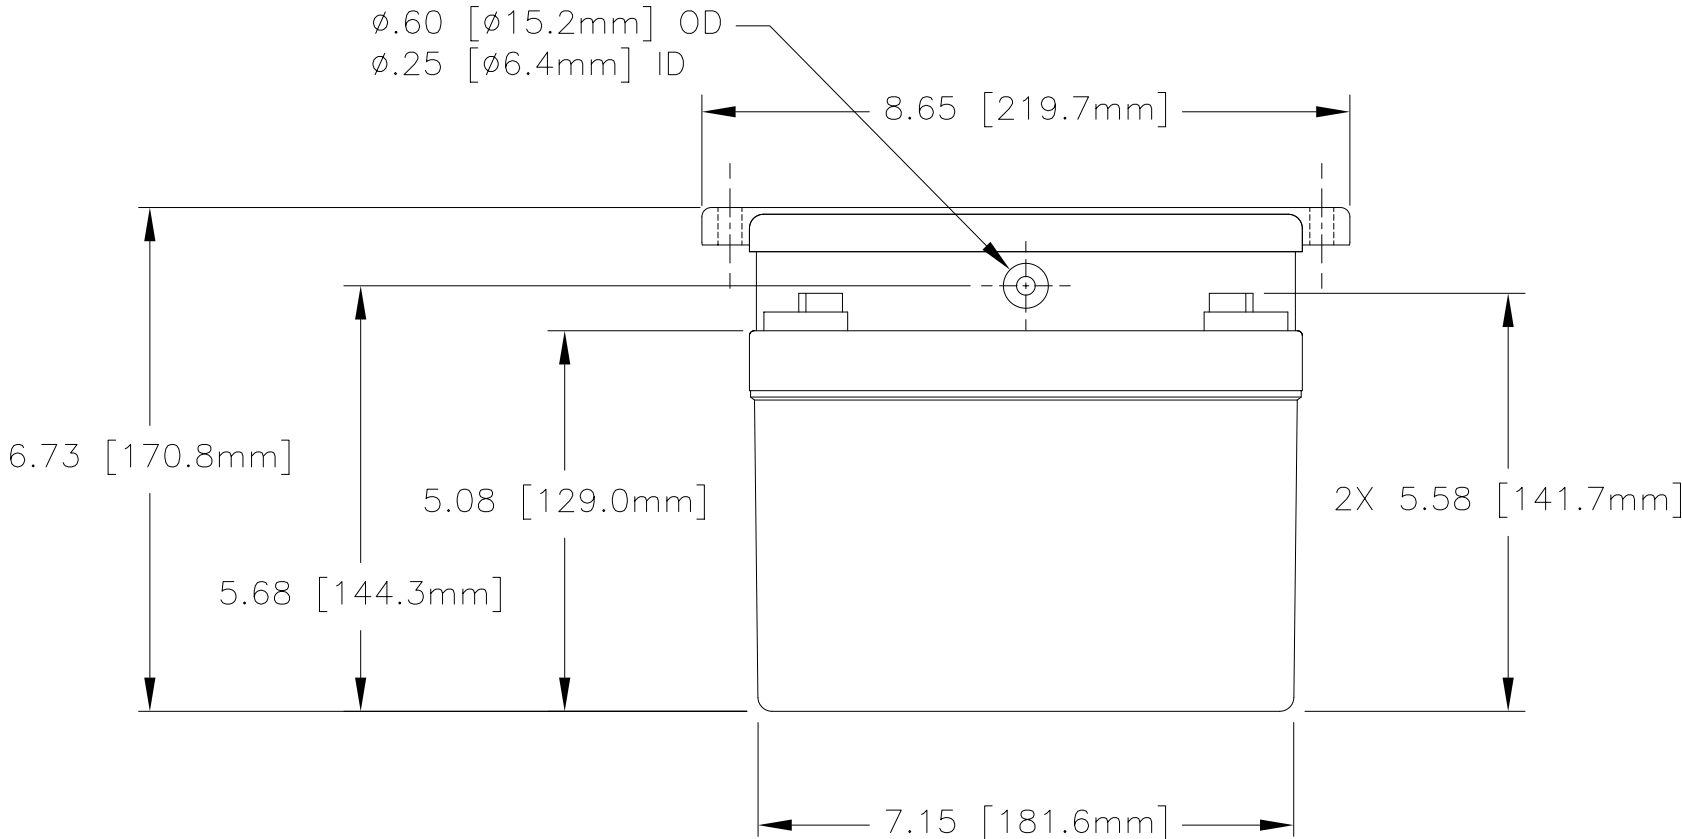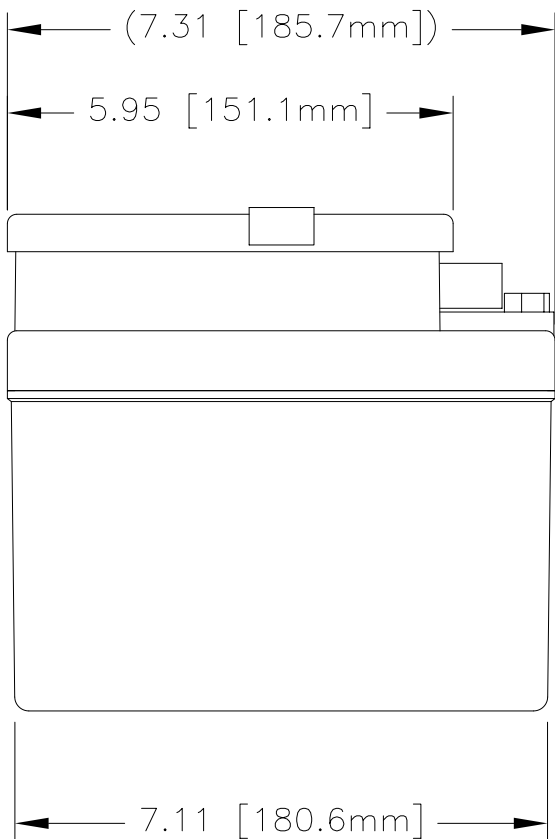

ENVELOPE DRAWING

QTY REQD		CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .06 ± 1° .XXX ± .060				CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
				TITLE BATTERY, LEAD ACID, 24 VOLT		
TREATMENT	NONE	CHECKED	AMIII	9/8/98	SIZE	CAGE CODE
FINISH	NONE	APPROVED	JBT	9/9/98	C	63017
SIMILAR TO	ACT WT	CALC WT	ISSUED	AT	2/21/02	DWG NO.
				SCALE	NONE	REV
				SHEET 1 OF 1		

The data/information contained herein has been reviewed and approved for general release on the basis that this document contains no export-controlled information.

ENGINEERING COPY 21FEB02